

型号 Z2FS系列为叠加式双单向节流阀通过改变节流口的节流型式，实现流量控制。

特性：


1. 进口节流与出口节流可选
2. 可螺栓调节



Model Z2FS series are double throttle check valves, it restricts the flow from actuator service port (A and B) of a directional valve.

Characteristic:

1. Meter in or meter out control as indicated
2. Reducing flow in actuator lines, control speed of the actuator in both directions
3. Screw adjustment with locknut, good performance

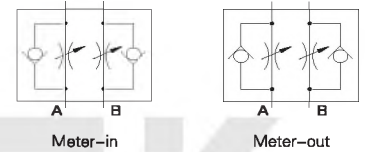

Meter-in

Meter-out

FT - Z2FS 6 - 40 / S

口径 Size 6, 10, 16, 22

系列号.

40 = 口径6; 30 = 口径10, 16, 22

Series no.

40 = Size6; 30 = Size10, 16, 22

S = 进口节流 S = Meter-in control

S2 = 出口节流 S2 = Meter-out control

其它文字说明
Further details

无标记 = 丁腈橡胶密封
V = 氟橡胶密封

No code = NBR seals for petroleum oils
V = FPM seals for phosphate ester

General information 基本参数				
口径 Size	6	10	16	22
流量 Flow rate (L/min.)	80	160	250	350
工作压力 Operating Pressure (MPa)	31.5	31.5	35	35

注：Z2FS安装尺寸见第 15 页

Note: Please check page 15 for Z2FS installation dimensions